


SADDLE CLAMP

CONNECTION

Ductile iron body

Locking screw

Double safety incorporated seal

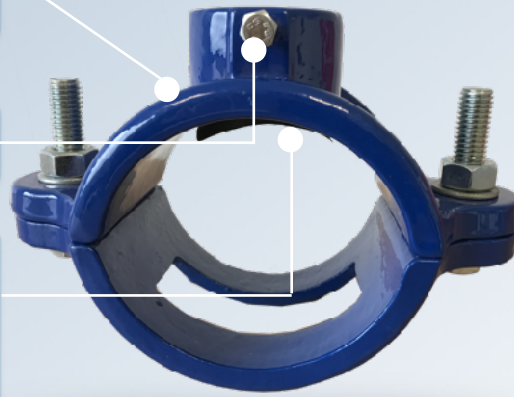

DESCRIPTION

- Ductile iron body
- Blue epoxy anti-corrosion surface coating
- EPDM seal ring
- Service pressure: 16 Bars
- Metric thread or *British Standard
- A.C.S certified product

For PVC / PE pipe



For PVC/PE PIPE

Réf	DE	Metric thread	British Standard	Kg	Réf	DE	Metric thread	British Standard	Kg
CPC217	63	GB	1/2" / 3/4"	1,40 kg	CPC243	63	PB	1/2" / 3/4"	1,30 kg
CPC218	75	GB	1/2" / 3/4"	1,70 kg	CPC244	75	PB	1/2" / 3/4"	1,60 kg
CPC219	90	GB	3/4' / 1"	2,10 kg	CPC245	90	PB	3/4' / 1"	1,90 kg
CPC220	110	GB	3/4' / 1"	2,30 kg	CPC246	110	PB	3/4' / 1"	2,10 kg
CPC221	160	GB	3/4' / 1"	3,10 kg	CPC247	160	PB	3/4' / 1"	3,10 kg
CPC222	200	GB	3/4' / 1"	4,70 kg	CPC248	200	PB	3/4' / 1"	4,10 kg
CPC223	225	GB	1"	4,90 kg	CPC249	225	PB	1"	5,00 kg
CPC224	250	GB	1"	5,30 kg	CPC250	250	PB	1"	5,30 kg
CPC225	315	GB	1"	7,10 kg	CPC251	315	PB	1"	7,05 kg

For iron / steel pipes



For cast iron / steel pipes

Réf	DN	OD (mm)	Metric thread	British Standard	Kg	Réf	DN	OD (mm)	Metric thread	British Standard	Kg
CPC201	60	69-85	GB	1/2" / 3/4"	1,40 kg	CPC230	60	69-85	GB	1/2" / 3/4"	1,40 kg
CPC202	80	88-105	GB	1/2" / 3/4"	2,00 kg	CPC231	80	88-105	GB	1/2" / 3/4"	1,86 kg
CPC203	100	107-126	GB	3/4' / 1"	2,85 kg	CPC232	100	107-126	GB	3/4' / 1"	2,40 kg
CPC204	125	132-153	GB	3/4' / 1"	3,00 kg	CPC233	125	132-153	GB	3/4' / 1"	2,70 kg
CPC205	150	158-179	GB	3/4' / 1"	3,45 kg	CPC234	150	158-179	GB	3/4' / 1"	3,00 kg
CPC206	200	218-230	GB	3/4' / 1"	5,20 kg	CPC235	200	218-230	GB	3/4' / 1"	4,40 kg
CPC207	250	272-282	GB	1"	5,80 kg	CPC236	250	272-282	GB	1"	5,50 kg
CPC208	300	323-332	GB	1"	6,75 kg	CPC238	300	323-332	GB	1"	6,10 kg
CPC209	350	356	GB	1"	7,20 kg	CPC237	350	356	GB	1"	6,80 kg